



◆ MODEL 型 式

VCXE-02

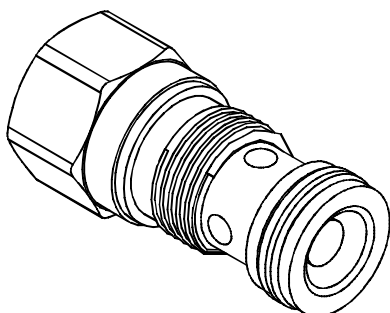

◆ PERFORMANCE (Cartridge Only)

特性曲線

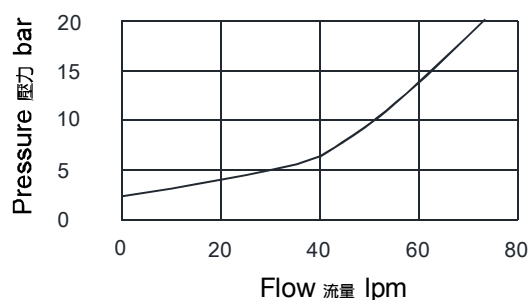

◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Flow 流量 lpm	Weight 重量 Kg
VCXE-02	350 (5076psi)	60 (15.85 gpm)	0.15 (0.33 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-30~100 (-22~212°F)	
Contamination Level 污染標準		ISO4406. 20/18/15 NAS1638. 9	

◆ HOW TO ORDER 編號說明

1	2	3
VCXE	02	20

1 VALVE SERIES 系列名稱

VCXE= Check Valves 止逆閥

2 PORTING 閥口

02 : T-13A

Cavity 孔口 : CST-13A

See Appendices-A 見附錄A

For Manifold See Appendices-B 油路板見附錄B

3 CRACKING PRESSURE 開啓壓力

03 : 0.3 bar (4psi)

10 : 1 bar (15psi)


20 : 2 bar (29psi)

35 : 3.5 bar (51psi)

50 : 5 bar (73psi)

70 : 7 bar (102psi)

◆ CONTROL PORT(S) 動作形式



◆ DIMENSIONS 外型尺寸圖

