



◆ MODEL 型 式


VF-10



◆ CONTROL PORT(S) 動作形式



◆ PERFORMANCE(Cartridge Only) 特性曲線

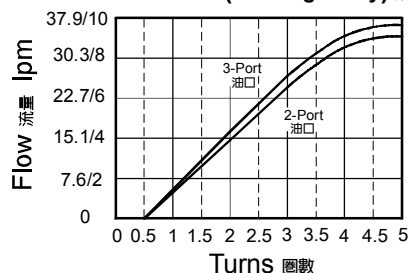

◆ DESCRIPTION 說明

A screw-in, cartridge-style, adjustable orifice, pressure-compensated, manually-operated, bypass-type hydraulic flow regulating valve. It can be used as a priority-type flow regulator or a restrictive-type 2-way flow regulator when the bypass port is blocked. The VF maintains a constant flow rate from ③ regardless of load pressure changes in the system downstream of ③, or in the bypass leg at ②. Reverse flow (③ to ①) bypasses the control orifice. The regulated flow increases from closed to fully open, with counter-clockwise rotation of the knob.

Note: When used as a bypass flow control in applications where the priority flow port will be blocked by external valving, bypass pressure drop will increase unless a small amount of leakage is provided for the priority port.

螺紋插式, 節流孔可調壓力補償, 手動操作旁通型流量調節閥, 可以用作優先型流量調節閥或當封閉旁路油口 ② 時可以用作二通節流型流量調節閥。

VF 型, 從 ③ 流出的流量保持不變, 不受 ③ 的下游回路或旁路 ② 的負載壓力變化影響, 反向液流 (③ 流向 ①) 不經過控制節流孔。

逆時針轉動手柄, 調節流量從閉合到完全打開時逐漸增加。

註: 當用作旁路流量控制且優先油口由其他的鎖封閉時, 除非優先油口有少量洩漏, 否則旁路壓降將增加。

◆ SPECIFICATIONS 規格

Model Number 型 式 號 碼	Operating Pressure 操作壓力 bar	Maximum Flow 最大流量 lpm	Regulated Flow Rate 調節流量 lpm		Weight 重 量 Kg
VF-10	240 (3481 psi)	57 (15.06 gpm)	2-Way 2通	3-Way 3通	0.2 (0.44 lbs)
			34 (8.98 gpm)	38 (10.04 gpm)	
Fluid Type 流體 型式			ISO VG 32 , 46 , 68		
Viscosity 黏性 cSt			10~400 (59~1854 SSU)		
Operating Temperature 操作溫度 °C			-30~100 (-22~212°F)		
Contamination Level 污 染 標 準			ISO4406. 20/18/15 NAS1638. 9		

● Flow Rate (額定流量): 3-Port regulated flow (Priority+Bypass) (油口 ③ 調節量 (優先+旁通)): 0~38 lpm (0~10 gpm)

● Input Flow (入口流量): 3-Port (Priority+Bypass) (油口 ③ (優先+旁通)): 0~38 lpm (0~10 gpm) nominal (標稱); 0~57 lpm (0~15 gpm) max (最大)

◆ HOW TO ORDER 編號說明

1	2	3	4
VF	10	— *	— *

1 VALVE SERIES 系列名稱

VF=Priority Flow Divider Valve
(Compensating Type) 優先分流閥(補償型)

2 SUBPLATE MOUNTING SIZE 稱呼口徑

Size:10

Cavity 孔口:CS10-3N

See Appendices-A 見附錄A

For Manifold See Appendices-B 油路板見附錄B

3 ADJUSTMENT OPTION 調整選擇

NONE	NONE:TOOL ADJUST 無:工具調整式	
K	K:HAND-BAR ADJUST K:手把調整式	
KT	KT:HAND-BAR ADJUST (Three-winged) KT:手把調整式(三翼)	
C	C:NUT ADJUST C:螺帽調整式	

4 SEALS 密封件

Non: NBR (Standard) 無記號:丁腈橡膠(標準型)

HN: HNBR

V: VITON

HN: 氫化丁腈橡膠

V: 氟橡膠

◆ DIMENSIONS 外型尺寸圖

